


PC SPACER SUPPORT

MATERIAL: NYLON 66 (UL)
FLAME CLASS : 94V-2 / 94V-0
COLOR: NATURAL
UNIT: mm




P.C.B Ø3.5
THICKNESS 1.2~1.6




PART NO	PACKAGE
FSL-25	1000

PC SPACER SUPPORT

MATERIAL: NYLON 66 (UL)
FLAME CLASS : 94V-2
COLOR: NATURAL
UNIT: mm

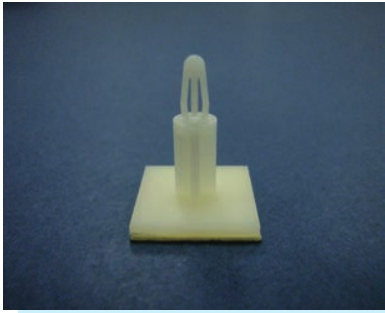


P.C.B Ø4.0
THICKNESS 1.2~1.7

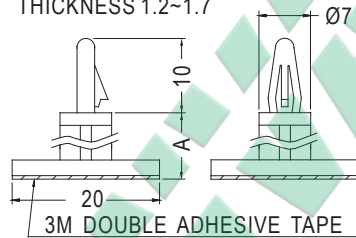

PART NO	A	PACKAGE
ASS-5	4.6	500
ASS-6	5.5	
ASS-8	7.2	
ASS-10	9.0	
ASS-12	12.0	
ASS-15	15.4	




P.C.B Ø4.0
THICKNESS 1.2~2.0

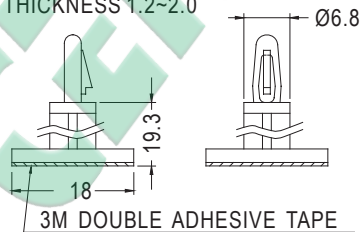

PART NO	PACKAGE
ASS-18.5	500

PC SPACER SUPPORT

MATERIAL: NYLON 66 (UL)
FLAME CLASS : 94V-2
COLOR: NATURAL
UNIT: mm

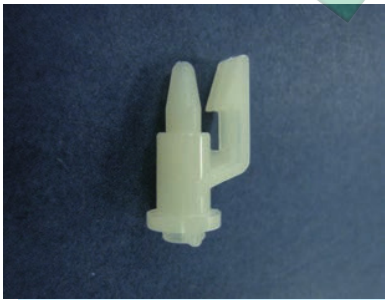

PART NO	A	B	C	D	E	F	PACKAGE
ULCC-6	6.3	1.73	14.8	2.7	1.3	5.25	500
ULCC-8	8.0	1.7	16.5				
ULCC-10	10.0	2.24	19.0	2.85	1.4		
ULCC-12	12.0	1.75	19.8				
ULCC-19	18.55	1.9	27.05	3.8	1.3	5.5	

FOR M3 TAPPING SCREW