

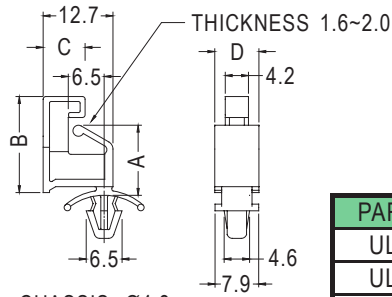


## PC SPACER SUPPORT

MATERIAL: NYLON 66 (UL)  
 FLAME CLASS :94V-2  
 COLOR:NATURAL  
 UNIT:mm

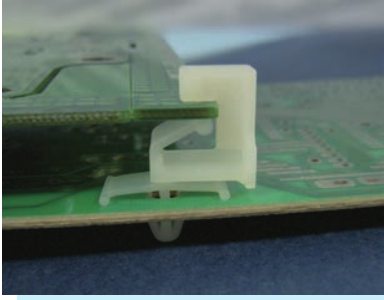

CHASSIS  $\varnothing$ 4.8  
 THICKNESS 0.8~2.0






ONLY FOR:ULCF-6~ULCF-8S

PART NO	A	B	C	D	PACKAGE
ULCF-6	6.3	11.0	9.0	8.0	1000
ULCF-8	8.0	12.7	9.0	8.0	
★ULCF-8S	8.0	12.7	7.6	6.0	
ULCF-9	9.5	14.2	9.0	8.0	
ULCF-12	12.7	17.4	9.0	8.0	
ULCF-16	15.9	20.6	9.0	8.0	

## PC SPACER SUPPORT




MATERIAL: NYLON 66 (UL)  
 FLAME CLASS :94V-2  
 COLOR:NATURAL  
 UNIT:mm

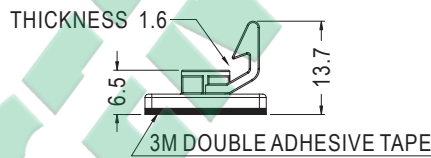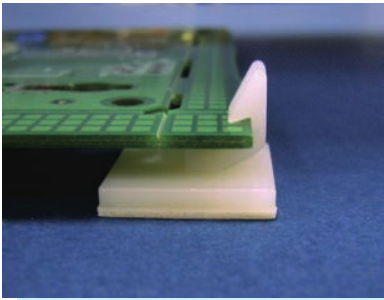

PART NO	PACKAGE
ULCK-6.4	1000

## PC SPACER SUPPORT

MATERIAL: NYLON 66 (UL)  
 FLAME CLASS :94V-2  
 COLOR:NATURAL  
 UNIT:mm

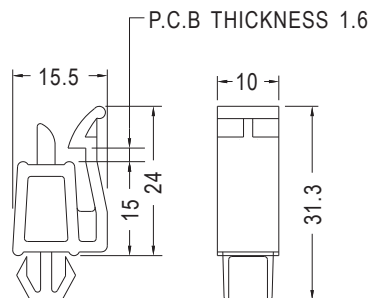

THICKNESS 0.8~2.4

PART NO	PACKAGE
KES-15	500