


IP 67



● SA24 Series IP67

SA24 connector is used to connect standard Ethernet Class D /Cat.5e and Class E/cat 6 (10 Base T , 100 base TX , 1000 Base T net works ) in outdoor or water proof harsh working environment . no need soldering , easy to connect , it is widely use in communications , LED boards , security monitoring , automation control etc.

Part number system

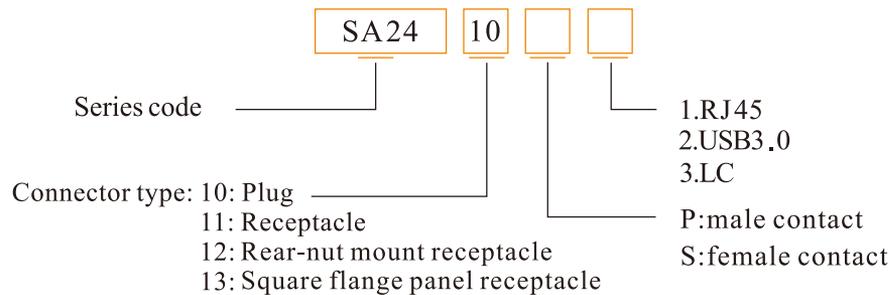


Material and spec

Coupling	Push-pull
Shell material	Anodized aluminium
Mating cycle	1500 (USB3.0)
	500 (LC, RJ45)
Temperature range	-20℃~+70℃ (USB3.0)
	-40℃~+85℃ (LC,RJ45)
IP rating	IP67
Insulation resistance	2000 MΩ


**IP67**




- SA24 Plug: SA2410/PLC

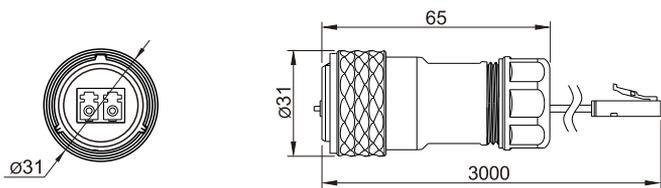


- SA24 receptacle: SA2411/SLC

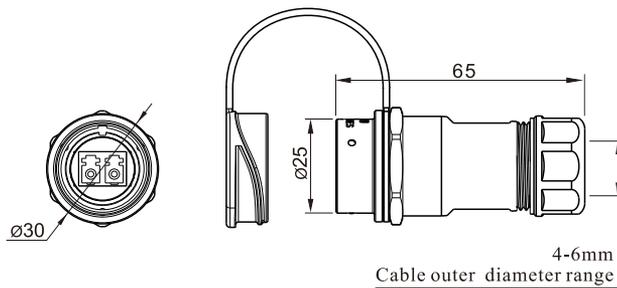

- Rear-nut mount receptacle: SA2412/SLC

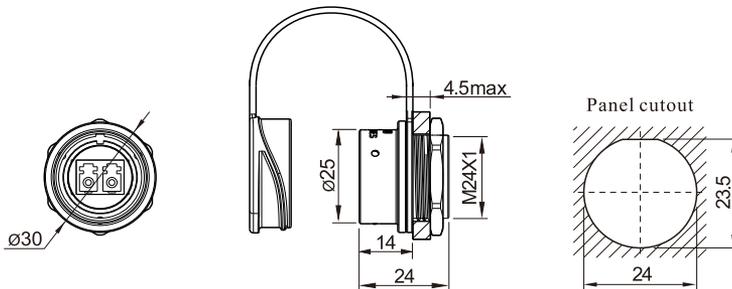


- Square flange receptacle: SA2413/SLC

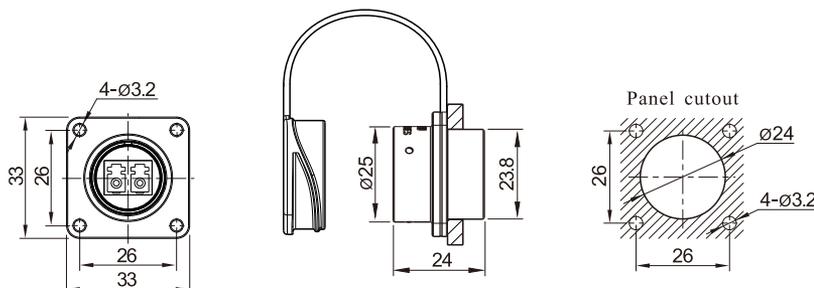


**IP 67**




- SA24 plug : SA2410/PRJ45

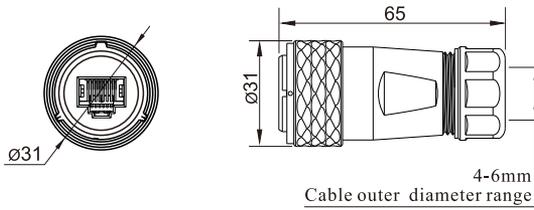


- SA24 receptacle: SA2411/SRJ45

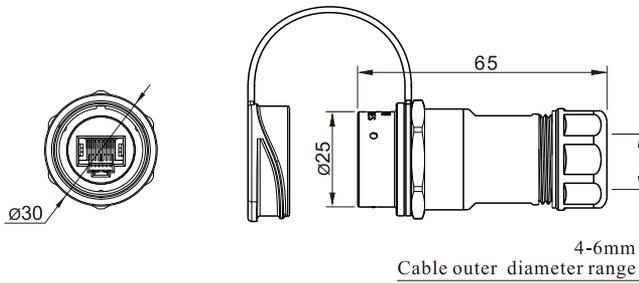

- Rear-nut moun receptacle: SA2412/SRJ45

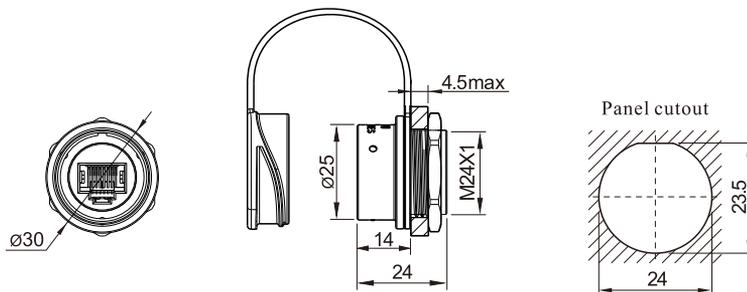


- Square flange receptacle: SA2413/SRJ45

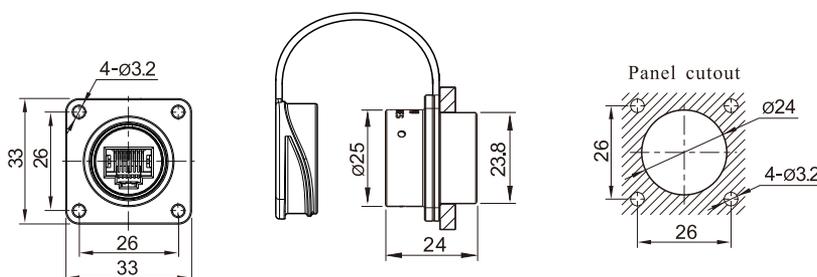


IP67




- SA24 plug: SA2410/PUSB3.0

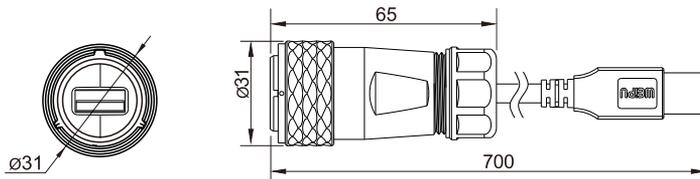

- SA24 receptacle: SA2411/SUSB3.0

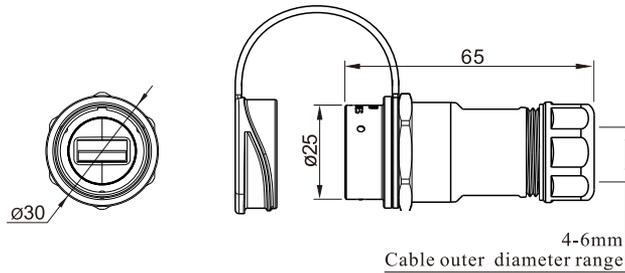

- Rear-nut mount receptacle: SA2412/SUSB3.0

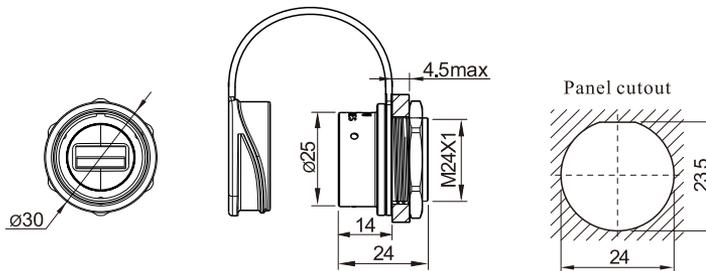

- Square flange receptacle: SA2413/SUSB3.0

